

M110A (Wax Ribbon)

M110A (Normal Ribbon) with low price and good performance of the label has to adapt to. M110A not only can be low heat printing, the application of a wide range of, but also charged to prevent the processing, the printer has a good adaptability.

Ribbon Property

Ink Material	Wax
Total Thickness	6.6 ± 0.5µm
Film Thickness	4.3 ± 0.3µm
Color Available	Black
Print Density	At least 0.55 (Macbeth Scale)
Print Energy	15mj/sq.mm

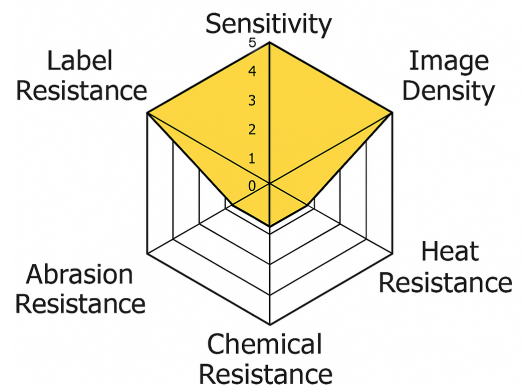


Image Property

Print Density	At least 1.5(Macbeth Scale)
Grade	ANSI ABOVE 3.5/A (Upright Code)
Recommended	Art paper. Paperboard
Scratch Resistance	Image density: Above 80% *
Boilproof Resistance	Image density: Above 28% **
Light Resistance	Image density: Above 30% ***
Using Environment	5~35°C / 20~80%RH
Storage Environment	0~40°C / 20~80%RH

*: Attrition Testing Machine 2.63 x 10⁷ PaTimes. about 1000 (Kraft Paper)

** : 93°C warm water conditions for 1 hours to boil

***: The use of UV test machine for 168 hours exposure test (about 3 months of light)

: The form above is just for reference

บริษัท มาร์คแพค จำกัด

เลขที่ 568/4 ซอยลาดพร้าว 112 (เอี่ยมสมบูรณ์)
ถนนลาดพร้าว แขวงพลับพลา เขตวังทองหลาง กรุงเทพมหานคร 10310
เลขประจำตัวผู้เสียภาษี : 0105550075295

Contact Us

✉ cs@pospak.com
☎ @pospak
🌐 www.pospak.com
📞 02-026-3361-2

Follow Us

📺 @pospakonline
📘 facebook/pospak
📺 @pospak_online

