



Eaton 5L UPS

- 1 LED
- 2 On / Off button
- 3 USB port
- 4 Fixed input cord 5-15P
- 5 Data line protection
- 6 4 outlets
Supports NEMA 5-15P and Schuko

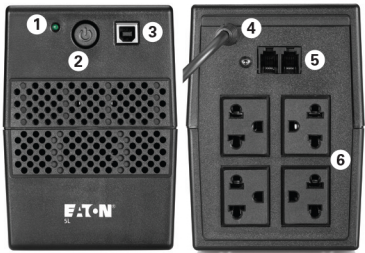

600VA / 800VA

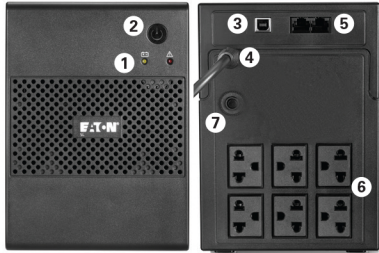

1000VA

- 1 LED
- 2 On / Off button
- 3 USB port
- 4 Fixed input cord 5-15P
- 5 Data line protection
- 6 6 outlets
Supports NEMA 5-15P and Schuko
- 7 Circuit breaker

Technical specifications	600 USB		800 USB	1000 USB
Rating (VA/W)	600VA/360W		800VA/480W	1000VA/600W
Format	Tower			
Electrical characteristics				
Technology	Line interactive			
Input voltage ranges without using batteries	160V - 290V			
Output voltage	230V			
Output frequency	Auto sensing, 50Hz default			
Data line surge protection (internet/tel/fax)	Yes			
Connections				
Input	5-15P fixed cord			
Outputs	4 outlets Support NEMA 5-15P and Schuko		6 outlets Support NEMA 5-15P and Schuko	
Batteries				
Typical backup times for 1 PC*	16 min	20 min	30 min	
Typical backup times for 2 PC*	5 min	6 min	11 min	
Typical backup times for 3 PC*	1 min	2 min	7 min	
Battery management	Permanent battery recharge, cold start			
Power management				
Communication ports	USB port			
Software	Winpower			
Operating conditions, standards and approvals				
Operating temperature	0-40°C			
Noise level	<40db			
Regulations	EN62040-2, EN61000-4			
Dimensions D x H x W / Weight				
Dimensions (mm)	278 x 100 x 140			359 x 139 x 191
Weight (kg)	4.3	5.1	8.9	
Customer service & support				
Warranty	2 years			

* Backup times are approximate and may vary with equipment, configuration, battery age, temperature, etc.

Model	600 USB	800 USB	1000 USB
Part Number	5L600TH	5L800TH	5L1000TH

Eaton is the trade name, trademark, and/ or service mark of Eaton Corporation or its subsidiaries and affiliates.