

B120EC

Standard

Resin • Flat head • Near Edge

- Higher heat resistance up to 150°C
- Excellent chemical and solvent resistance
- Applicable to a wide range of synthetic materials: PET/PP/PE/PVC films...
- Ricoh's unique coating on the back allows reliable and superior matching qualities with the thermal head

PRINTING PROPERTIES

Maximum printing speed 10 IPS

	Non top-coated paper	Top-coated paper	PET	PE	PP
Compatibility	Partial	✓	✓	✓	✓
Image density	-	1.76	1.60	1.81	2.05

Note: Smoothness Bekk for paper family must be over 2000s.

Image resolution for paper & film:

Minimum size: - For the lines: 0.1mm - For the characters: 1.0mm

RIBBON PROPERTIES

- Total ribbon thickness: < 9 µm
- Polyester film thickness: 4.5 µm
- Friction coefficient: < 0.045
- Ink melting point: 97°C
- Tearing resistance: > 200N/mm²
- Transmission density: 0.65 mini

CERTIFICATES/ DIRECTIVES

 TSCA Toxic Substance Control Act	 RoHS Restriction of Hazardous Substances	 WEEE Waste Electrical & Electronic Equipment	 REACH Chemical & Environment	 BS 5609 Section III
 ISO EN71-3 European Standard EN71	 2003/11/EC Directive 2003/11/EC	 2000/53/EC Directive 2000/53/EC	 76/769/EEC Directive 76/769/EEC	

Application



Electronics



Heat resistance



Scan to visit product's page

GENERAL CONDITION

Usage conditions: 5 to 35°C at 30 to 85% of relative humidity.

Storage conditions: Keep indoor avoiding high temperature, high humidity, direct sunlight.

Storage life: 12 months after slitting day.

RICOH
imagine. change.


PRINTED IMAGE DURABILITY

Test lead with flat head technology

TESTS	RESULT	B120EC with standard matt white polyester
Smear + heat 100°C	ANSI A	
Smear with cardboard (weight 1kg - 50 back & forwards)		Engine oil 250
Heat (150°C)	No ink on the cotton fabric	Brakefluid 8
Heat gradient 3.6kgF/cm ²		Windshieldwasher 250
Scratch	ANSI A	Diesel 250
50 back and forwards with a rub tester		Unleaded petrol 150
Light	ANSI A	IPA 170
Xenon lamp at 650W/m ²		Ethanol 40
Water	ANSI A	
24 hours in water		

Back & forwards until beginning of erase

B1120EC DURABILITY

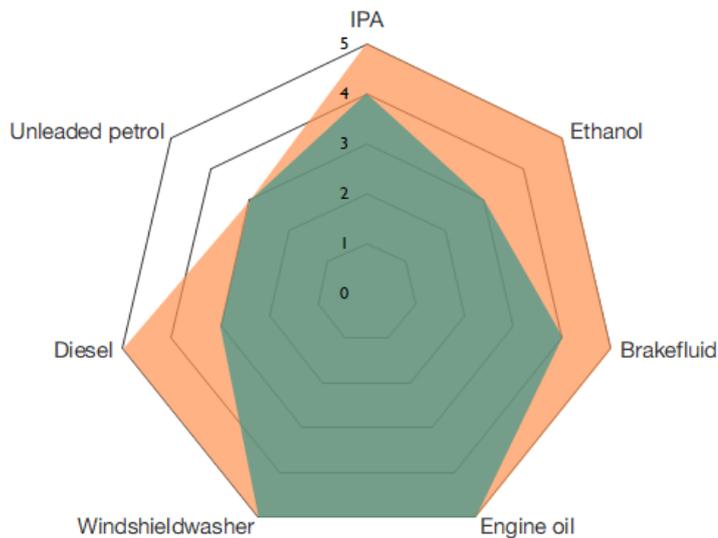

5: No damage

0: Erased

 B120EC with Standard white polyester

 B120EC with specific* polyester
*dedicated to solvent resistance

These performances are for guidance only. Results are obtained with adapted receiving material and optimum print conditions. (Ricoh test method)

RICOH VIETNAM COMPANY LTD.

F17, E.Town Central, 11 Doan Van Bo, Ward 13, District 4, HCM City

Tel: +84 28-3528-5252

Fax: +84 28-3636-7211

Email: thermal@ricoh.com.vn

Website: <https://ricoh.com.vn/products/thermal>



Scan to visit product's page

* Specifications are subjected to change without notice.

* The color(s) of the actual product may vary from the color(s) shown in this datasheet