

# B120E

Premium

Wax-Resin • Near Edge

- Good heat resistance up to 110°C
- For low smoothness paper - 30°C corrugated cardboard scraping resistance
- Applicable to a wide range of receiving labels: paper, coated paper, PET/PP/PE/PVC films...
- Ricoh's unique coating on the back allows reliable and superior matching qualities with the thermal head

## PRINTING PROPERTIES

Maximum printing speed 10 IPS

	Non top-coated paper	Top-coated paper	PET	PE	PP	PVC
Compatibility	✓	✓	✓	✓	✓	✓
Image density	1.85	1.85	1.74	1.80	2.05	1.87

Image resolution for paper:

Minimum size: - For the lines: 0.2mm  
- For the characters: 1.5mm



Image resolution for film:

Minimum size: - For the lines: 0.1mm  
- For the characters: 1.0mm

## RIBBON PROPERTIES

- Total ribbon thickness: < 9 µm
- Polyester film thickness: 4.5 µm
- Friction coefficient: < 0.035
- Ink melting point: 84°C
- Tearing resistance: > 200N/mm<sup>2</sup>
- Transmission density: 1.00 mini

## CERTIFICATES/ DIRECTIVES



## Application



Tags



Logistic/ Shipping



Multi purpose label



Scan to visit product's page

## GENERAL CONDITION

*Usage conditions:* 5 to 35°C at 30 to 85% of relative humidity.

*Storage conditions:* Keep indoor avoiding high temperature, high humidity, direct sunlight.


*Storage life:* 12 months after slitting day.

**RICOH**  
imagine. change.

## PRINTED IMAGE DURABILITY

TESTS	RESULT
Smear + heat 30°C	ANSI A
Smear with cardboard (weight 1kg - 50 back & forwards)	
Heat (110°C)	No ink on the cotton fabric
Heat gradient 3.6kgF/cm <sup>2</sup>	
Scratch	ANSI A
50 back and forwards with a rub tester	
Light	ANSI A
Xenon lamp at 650W/m <sup>2</sup>	
Water	ANSI A
24 hours in water	

## B120E DURABILITY

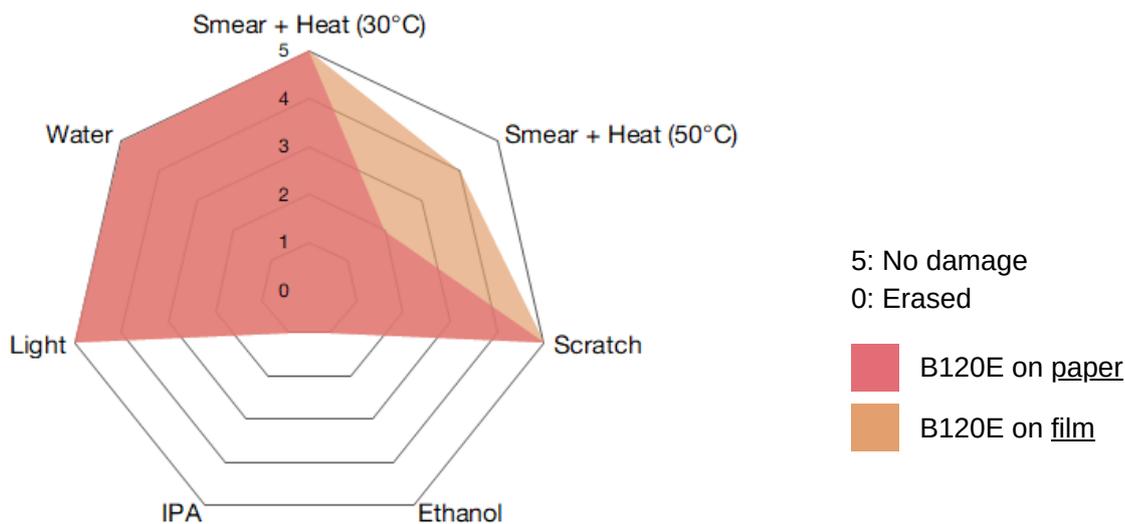

These performances are for guidance only. Results are obtained with adapted receiving material and optimum print conditions. (Ricoh test method)

### RICOH VIETNAM COMPANY LTD.

F17, E.Town Central, 11 Doan Van Bo, Ward 13, District 4, HCM City

Tel: +84 28-3528-5252

Fax: +84 28-3636-7211

Email: [thermal@ricoh.com.vn](mailto:thermal@ricoh.com.vn)

Website: <https://ricoh.com.vn/products/thermal>



Scan to visit product's page

\* Specifications are subjected to change without notice.

\* The color(s) of the actual product may vary from the color(s) shown in this datasheet